

POGOPIN:

1.MATERIAL:

- 1.1 Plunger:Brass(Au:5uⁿ)
- 1.2 Barrel:Brass(Au:3uⁿ)
- 1.3 Spring:STUS 304

2.SPECIALITY:

- 2.1 Rated Voltage/Current:DC 12V/2.0A
- 2.2 Contact Resistance:50mΩ Max.
- 2.3 Insulation Resistance:100mΩ Min.
- 2.4 Dielectric withstanding voltage:100V AC
- 2.5 Durability: 10000times.
- 2.6 Operating condition:Temperature-20°C~+70°C
- 2.7 Spring force:20~40gf
- 2.8 Salt spray test:48H Min.

磁铁:

- 1. MATERIAL:
- 1.1 钕铁硼，性能：N 5 2，对吸磁力>120gf.
- 1.2 盐雾测试:48H Min.

NOTE:


- 1.CABLE: 扁线 1.25*3.0 14*0.06+500D/4C 黑色PVC PC057
- 2.CONNECTOR: pogo pin Gold 10u" plating on contact area
- 3.MOLDING: PVC: 30p color:BLACK

ELECTRONIC TEST:

- A. OPEN/SHORT/INTERMITTENCE: 100%.
- B. HI-POI: 300V AC/sec
- C. INSULATION RESISTANCE: 2MΩ (MIN)
- D. CONDUCTIVE RESISTANCE: 10Ω (MAX)

包装方式:

- 1. 数据线和接方式如右图外型扎线扎好后，用透明PE袋封装，1PCS/袋；
- 2. 每100PCS/包；1600PCS/箱。

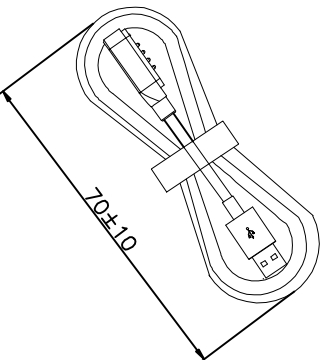

Contact Number	Signal Name	Typical Wiring Assignment
1	VBUS	Red
2	D-	White
3	D+	Green
4	GND	Black

KASN 坤盈电子

GENERAL TOLERANCE UNLESS OTHER WISE NOTED	Angle .X ±2°	CUSTOMER COPY	USB A+POGOPIN CABLE
	.XX ±0.25	PART NO.	CBUP0034-060
	.XXX ±0.15	DRAWING NO	180111-A00
	.XXX ±0.05	SCALE	4:1
		UNIT:mm	A4
			SHEET: 1 of 1

A	NEW RELEASE	CHANGE	APPRD.	CHECKED BY: 姚致强	SCALE	UNIT:mm	SHEET: 1 of 1
RVE.	ECN NO.	DESCRIPTION					